EuroClad Accessories

Fixings/Cavity Jointer		
Description	**Colour**	**Size**
6g x 50mm Screws	Stainless Steel	200 Per Box
Vertical Starter Strip 20mm Cavity	ColourSteel Maxx – Iron Sand	3000mm

Y Corner		
Colour	**Size**	
African Ebony	5500mm	
Cedar		
Coast White		
Dark Cedar		
Silver Oak		
White Oak		

Sealant	
Colour	**Size**
African Ebony	250ml
Cedar	
Coast White	
Dark Cedar	
Silver Oak	
White Oak	

External/Internal Corner Jointer (Part A)		
Colour	**Size**	
African Ebony	5500mm	
Cedar		
Coast White		
Dark Cedar		
Silver Oak		
White Oak		

External/Internal Corner Jointer (Part B)		
Colour	**Size**	
African Ebony	5500mm	
Cedar		
Coast White		
Dark Cedar		
Silver Oak		
White Oak		

Connection Jointer (Part A)		
Colour	**Size**	
African Ebony	5500mm	
Cedar		
Coast White		
Dark Cedar		
Silver Oak		
White Oak		

Connection Jointer (Part B)		
Colour	**Size**	
African Ebony	5500mm	
Cedar		
Coast White		
Dark Cedar		
Silver Oak		
White Oak		

Edge Cover (Part A)		
Colour	**Size**	
African Ebony	5500mm	
Cedar		
Coast White		
Dark Cedar		
Silver Oak		
White Oak		

Edge Cover (Part B)		
Colour	**Size**	
African Ebony	5500mm	
Cedar		
Coast White		
Dark Cedar		
Silver Oak		
White Oak		

Z Profile		
Colour	**Size**	
African Ebony	3000mm	
Cedar		
Coast White		
Dark Cedar		
Silver Oak		
White Oak		

Starter Strips	
Colour	**Size**
Aluminium	3000mm Horizontal
Aluminium	3000mm Vertical
Horizontal 	Vertical 

EuroClad

Pre-Finished Engineered Timber Cladding Solution.

PSP MATERIALS PRODUCTS SOLUTIONS

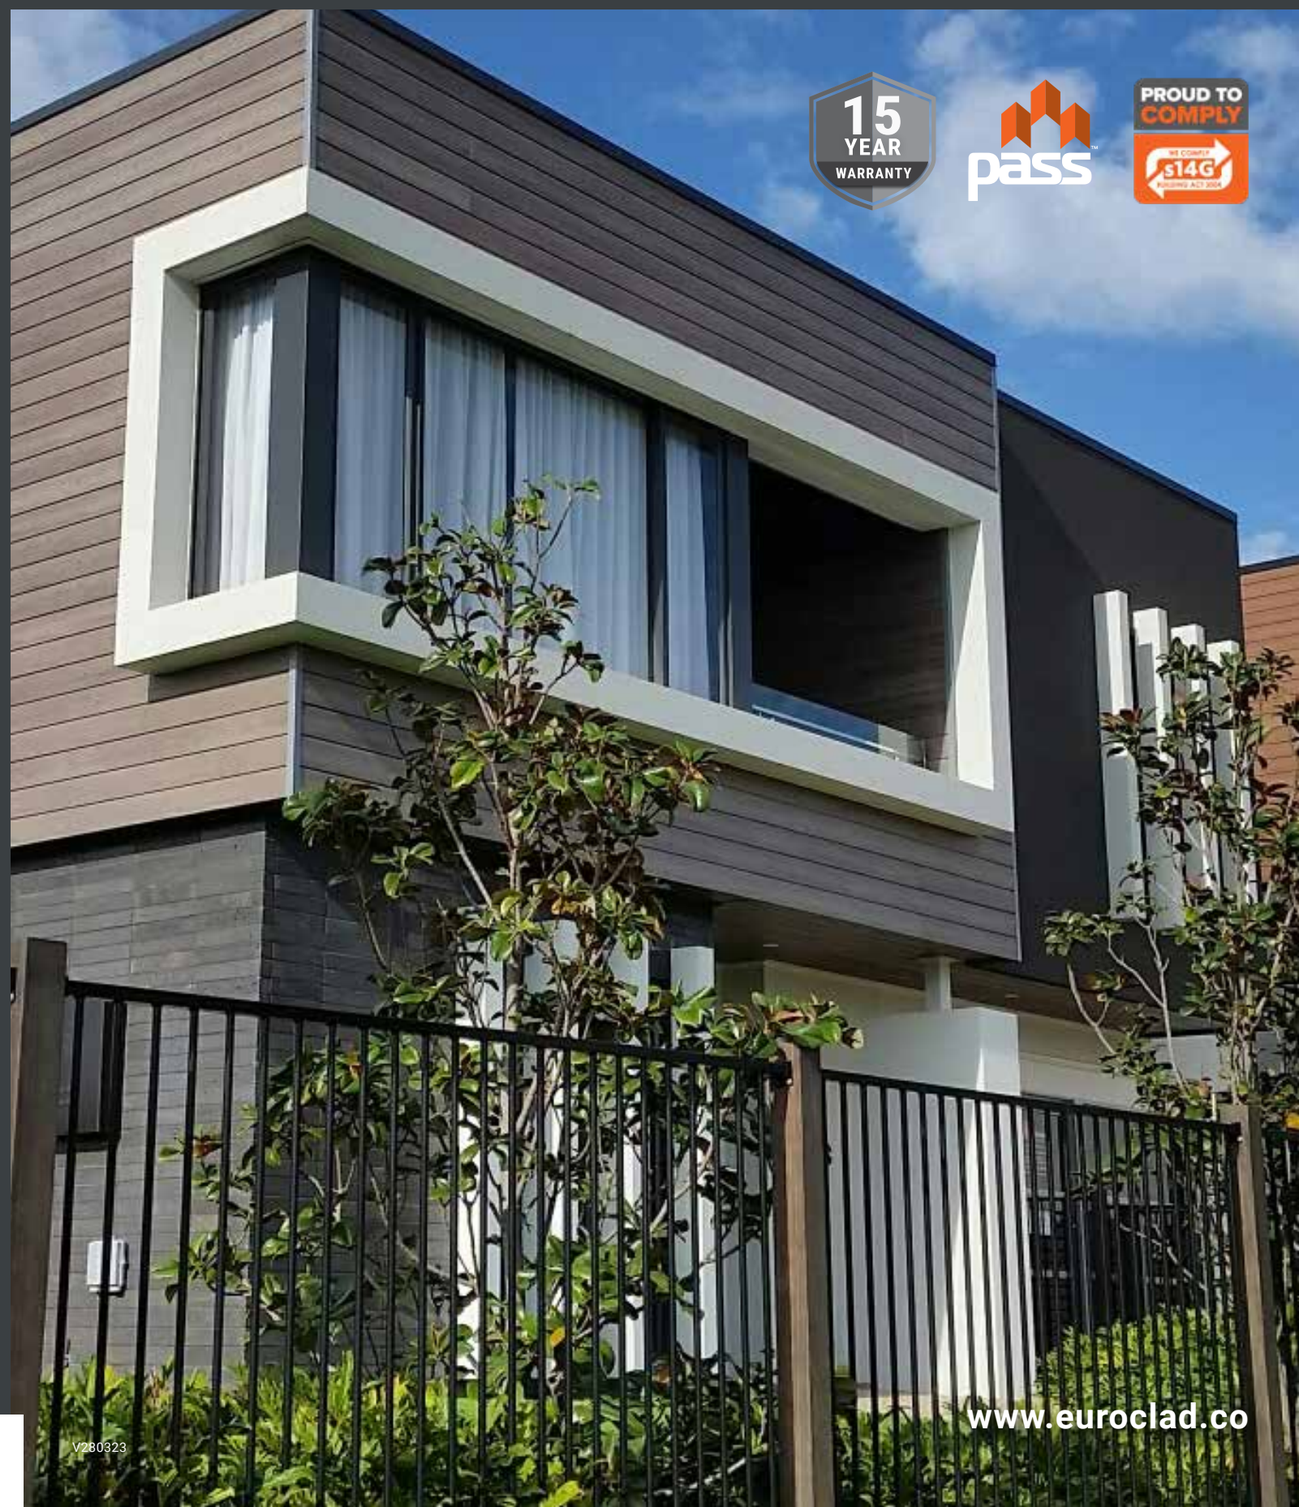

EuroClad

PSP EuroClad - Selekta is a unique pre-finished composite cladding facade with a beautiful timber grain embossed surface. Designed to offer premium style and long lasting results, EuroClad - Selekta has a realistic timber finish look offering all the appeal of real timber without the need for ongoing upkeep.
EuroClad - Selekta has 6 stunning colours to choose from. Best of all, it's maintenance free meaning your home will continue to look great year after year.

Features & Benefits

Durability & Moisture Resistant
Finely chopped wood and high quality resins for strong bonding, guarantee the highly compressed and dimensionally stable material structure E2/VMI certified.

PEFCTM Certified
Timber components sourced from PEFC™ certified, sustainably managed forest.

Hidden Fixing System
Simple tongue and groove fixing system with machined screw slots.

Non Leaching
The only timber look cladding that cannot leach as there are no tannins impregnated into the profile.

Rot and Pest Resistant
Guaranteed not to rot, split, warp or check. Highly resistant to damage caused by termites and fungal decay.

High R_w Acoustic Rating
Laboratory acoustic testing results available.

Ideal Timber Substitute
Perfect for use in high exposure or difficult to access areas.

Pre-finish
Low maintenance does not need to be painted or stained.

Comprehensive 15 Year Warranty
Guaranteed quality and peace of mind.Visit www.psp.co.nz for more information.

Group fire rating
AS/NZ 3837
AS5113

Choose Your Colour

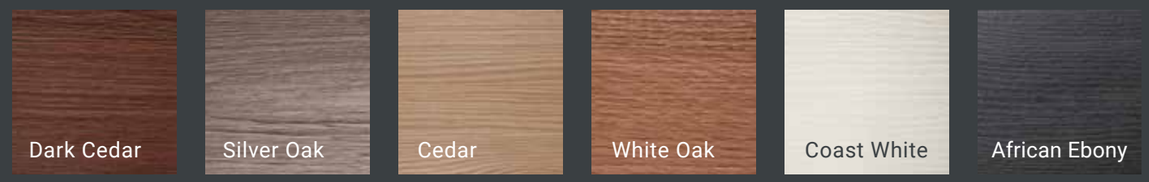

Panel Details

Colour	Dimensions	Thickness
African Ebony	170mm x 5400mm (155mm cover)	18mm
Cedar		
Coast White		
Dark Cedar		
Silver Oak		
White Oak		

Properties

Properties	Result
Weight per m² (kg)	9.7
Light fastness	Level 8 DIN 54 004
Impact Strength/Density	800-900kg/M3
Expansion/Contraction	1-3mm/m
Sustainability	PEFC Certified
Fire Rating	Internal Group 3
Cleaning	Warm soapy water with a cloth.